




63MM O.D. STAINLESS STEEL LEGS PATA Ø EXT 63MM DE INOXIDABLE

1. Stainless steel tubing is 0.7mm, #300 or #200 series. #4 satin finish.
2. Static load ratings up to 2200lb. (1000kg)
3. Leg height to your specification from 65mm to 127mm.
4. Welded or embed plates provided for easy mounting.

1. Tubo inoxidable 201 o 304, espesor 0.7mm. Opcional Mate
2. Carga estática 1000Kg
3. Nivelación 65mm-127mm
4. Disponible: Chapa soldada o remachada

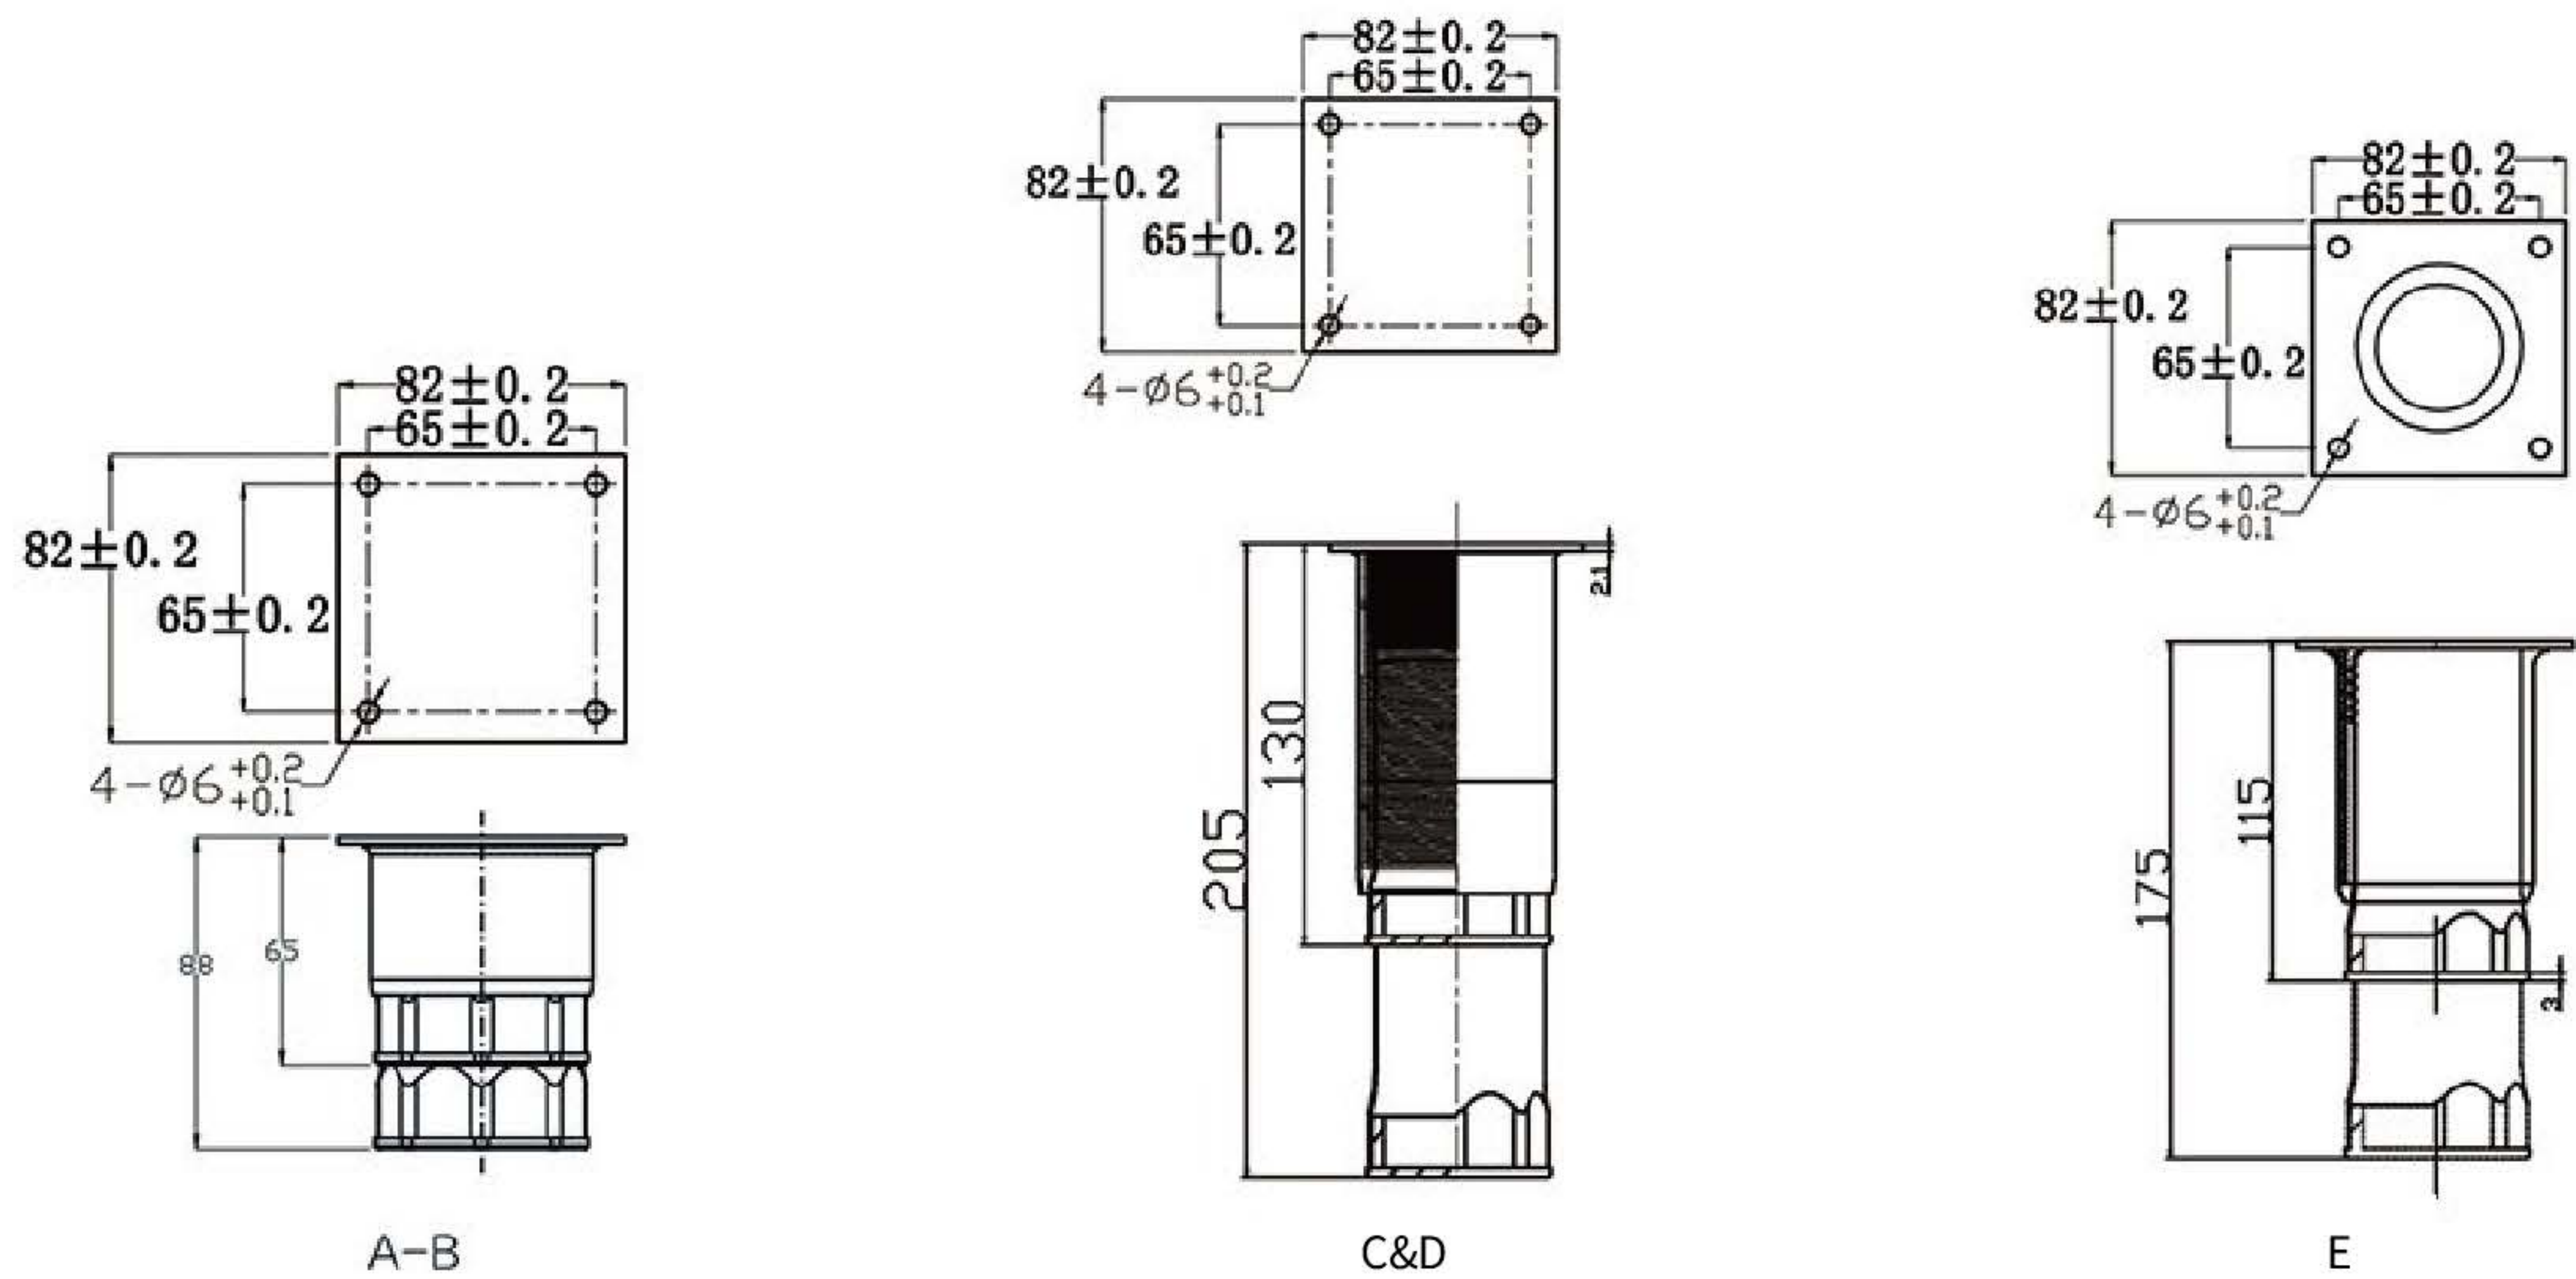


REF.	MODEL NO.	FIXED PLATE CHAPA	FOOT PARTE FIJA	MIN. HEIGHT MIN. ALTURA	MAX. HEIGHT MAX. ALTURA	STATIC LOAD RATING LBS./KG/FT RESISTENCIA IB(KG)
A	PNX65-88	Welded SS. Plate Chapa inox soldada	Octangular Octágono	65MM	88MM	1000KG
B	PNX65-88*	Embedded GA. Plate Chapa remachada	Octangular Octágono	65MM	88MM	1000KG
C	PNX130-205	Welded SS. Plate Chapa inox soldada	Octangular Octágono	130MM	205MM	1000KG
D	PNX130-205	Embedded SS. Plate Chapa inox remachada	Round Redondo	130MM	205MM	1000KG
E	PNX115-175*	Embedded SS. Roundplate Chapa inox remachada	3-1/2" SS flange, 3 mounting holes Chapa de 3 taladros	115MM	175MM	1000KG




PNX 140-200_PLN 89x89

Body: 63MM O.D. Stainless steel pipe/
Parte móvil: Ø EXT 63MM de inoxidable
Foot: 56MM O.D. Stainless steel pipe/
Parte fija: Ø EXT 56MM de inoxidable
Plate size/Medida de chapa: 89 x 89 MM
Adjustable range/Nivelación: 140-200MM
Bottom: Octangular grey plastic/Octágono plástico gris
Loading capacity/Resistencia: 1000KG

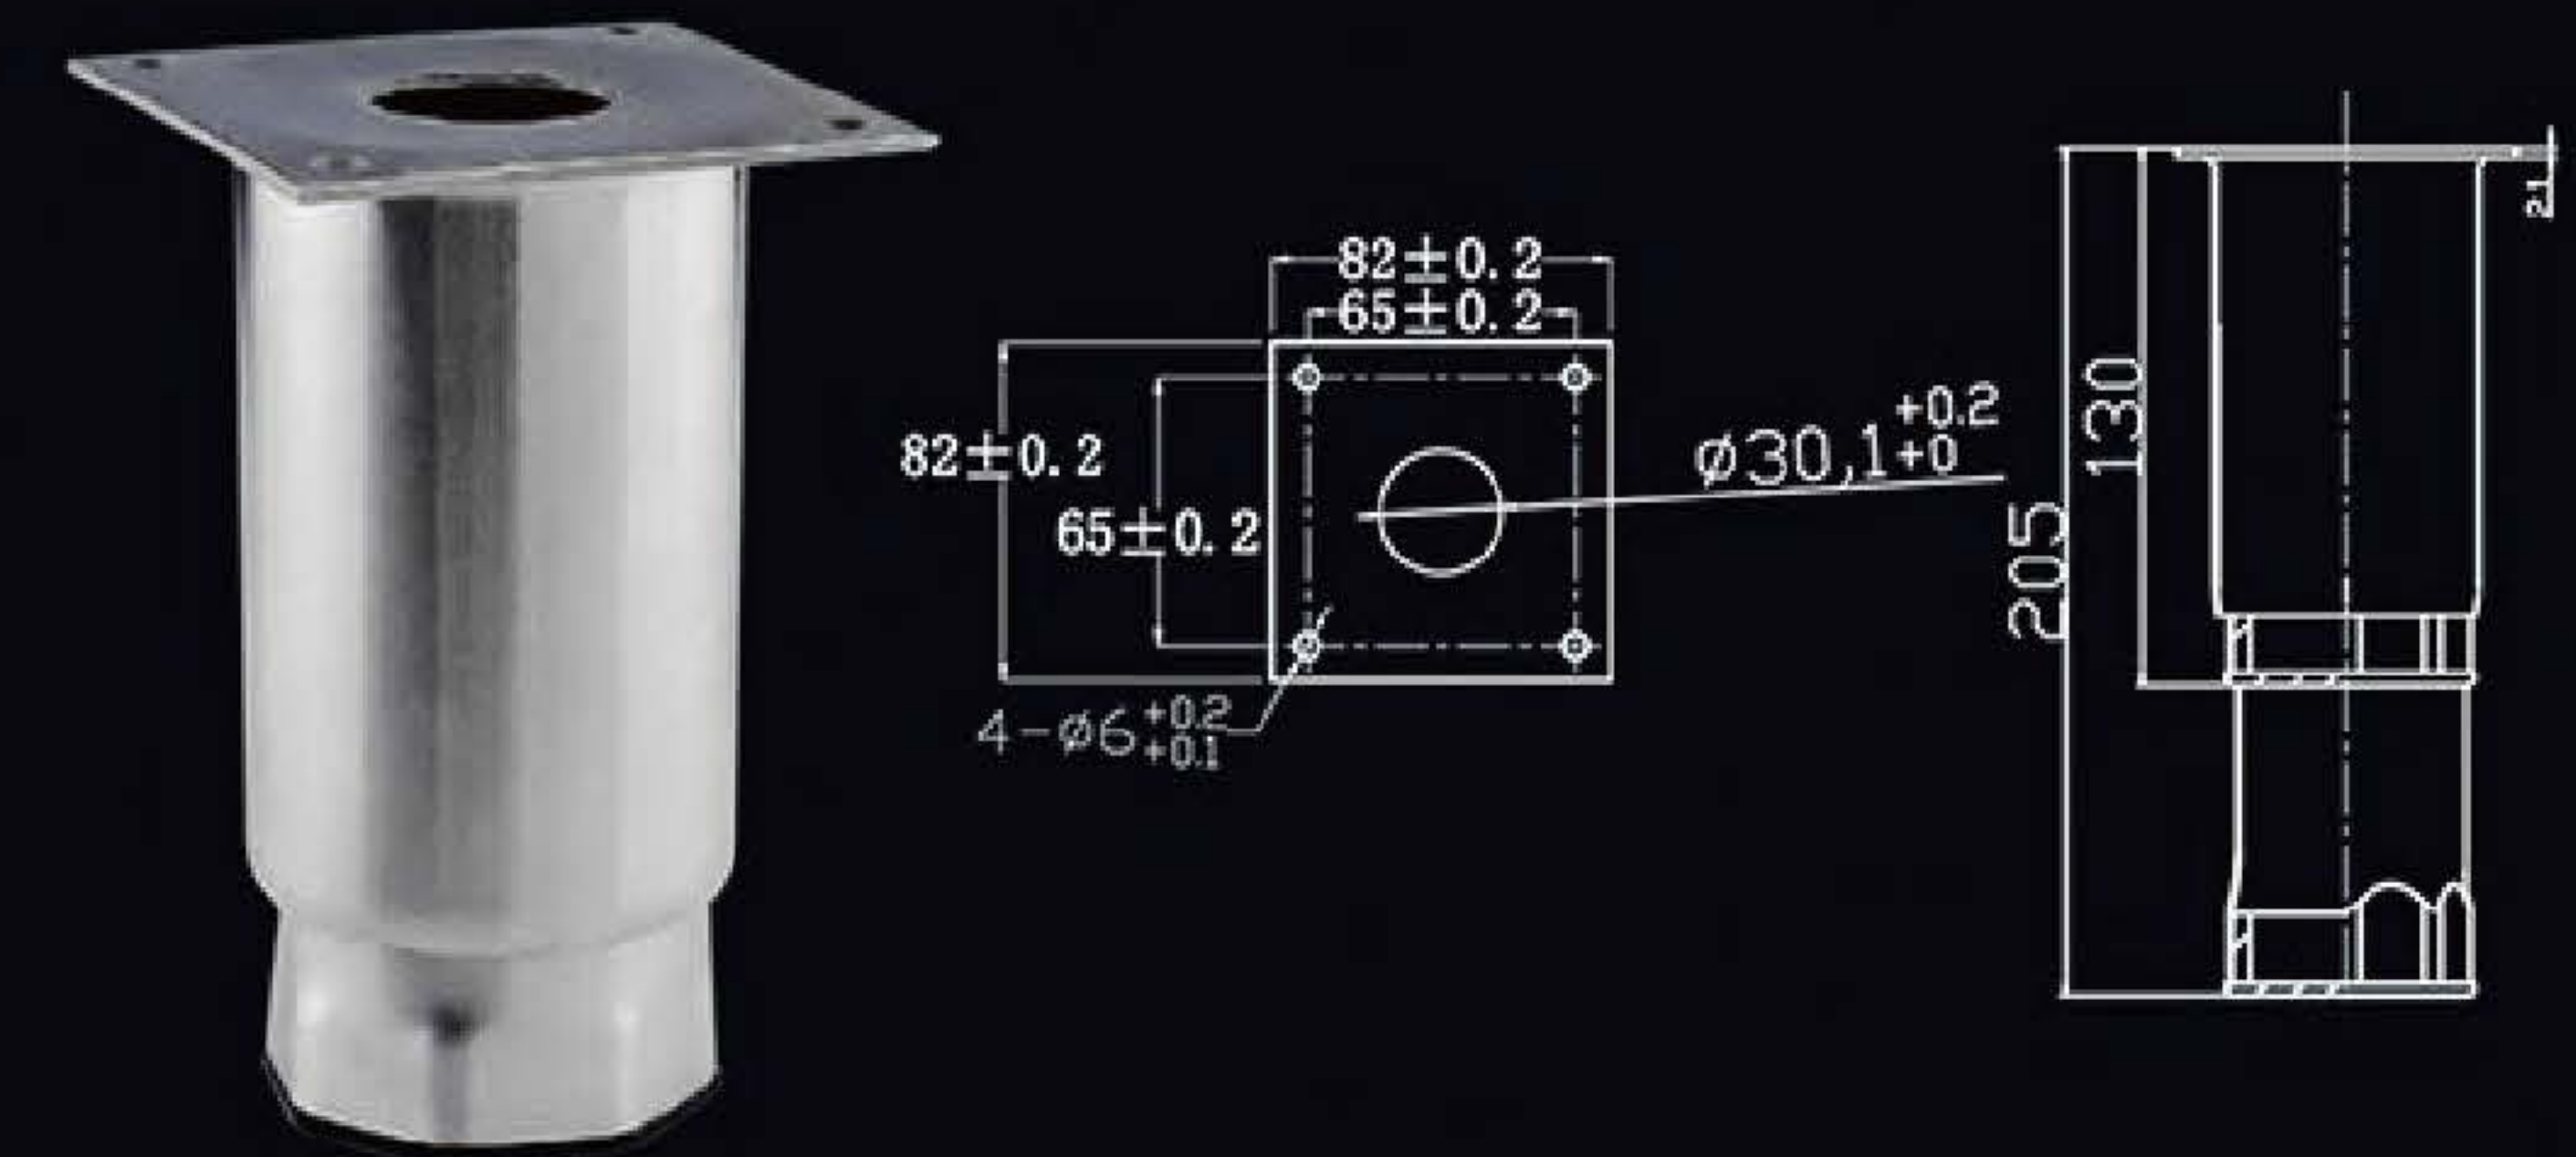


PNX 130-205_PLN 82x82

Body: 63MM O.D. Stainless steel pipe/
Parte móvil: Ø EXT 63MM de inoxidable
Foot: 56MM O.D. Stainless steel pipe/
Parte fija: Ø EXT 56MM de inoxidable
Plate size/Medida de chapa: 82 x 82 MM
Adjustable range/Nivelación: 130-205MM
Bottom: Octangular black plastic/Octágono plástico negro
Loading capacity/Resistencia: 1000KG

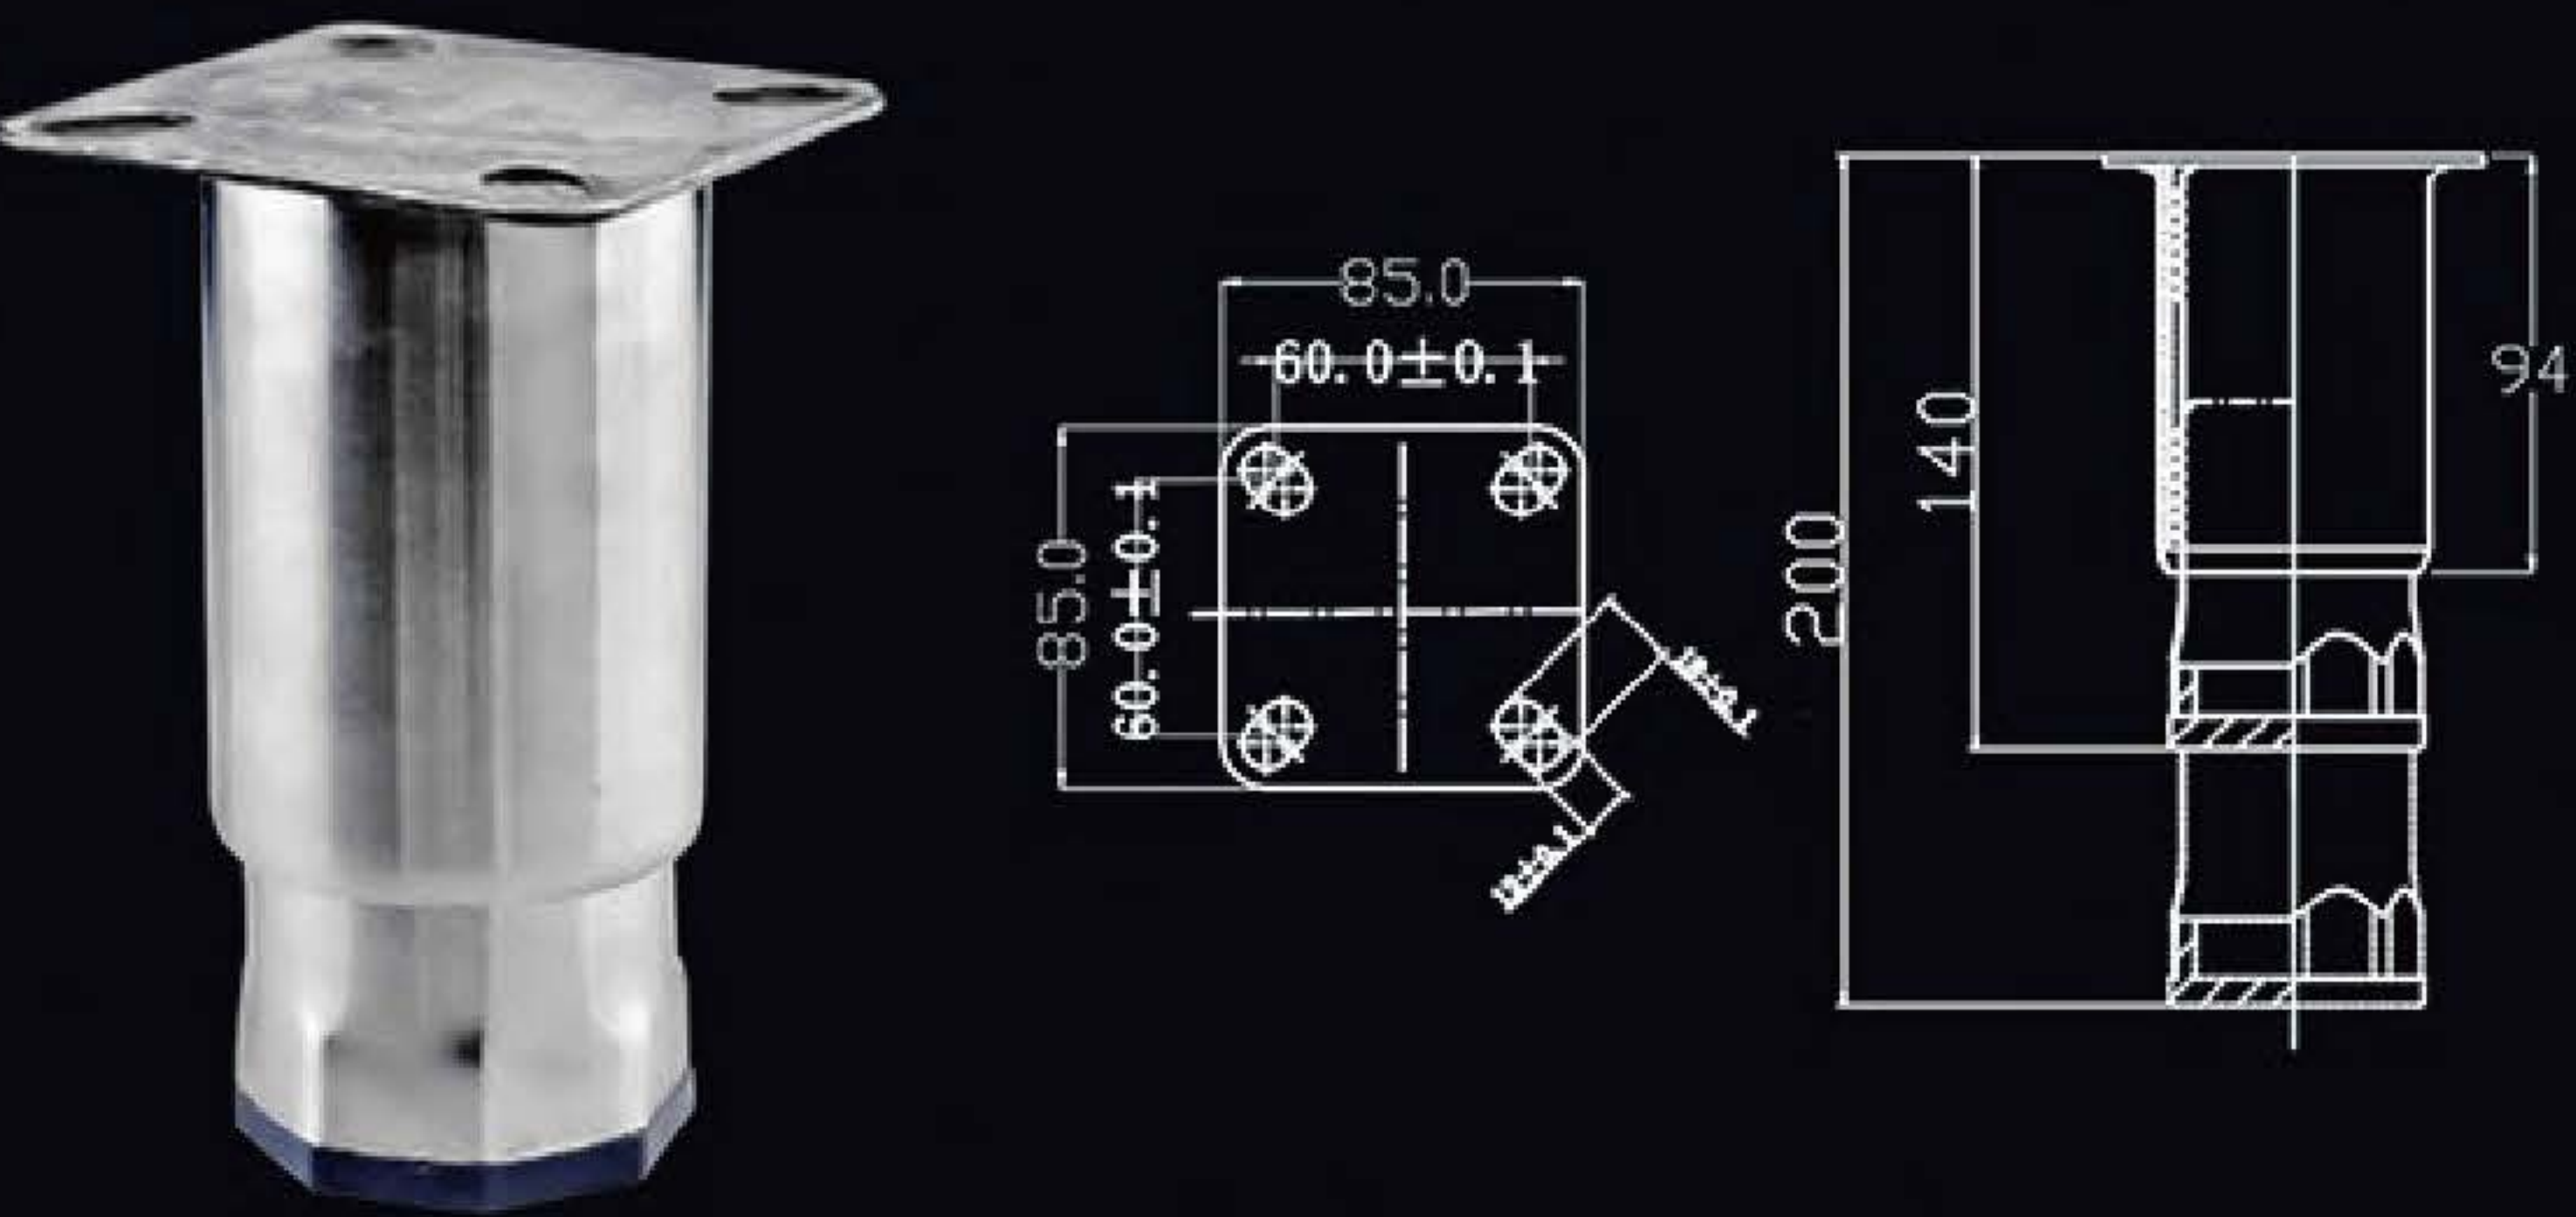


PNX 140-200_PLN 85x85

Body: 63MM O.D. Stainless steel pipe/
Parte móvil: Ø EXT 63MM de inoxidable
Foot: 56MM O.D. Stainless steel pipe/
Parte fija: Ø EXT 56MM de inoxidable
Plate size/Medida de chapa: 85 x 85 MM
Adjustable range/Nivelación: 140-200MM
Bottom: Octangular grey plastic/Octágono plástico gris
Loading capacity/Resistencia: 1000KG

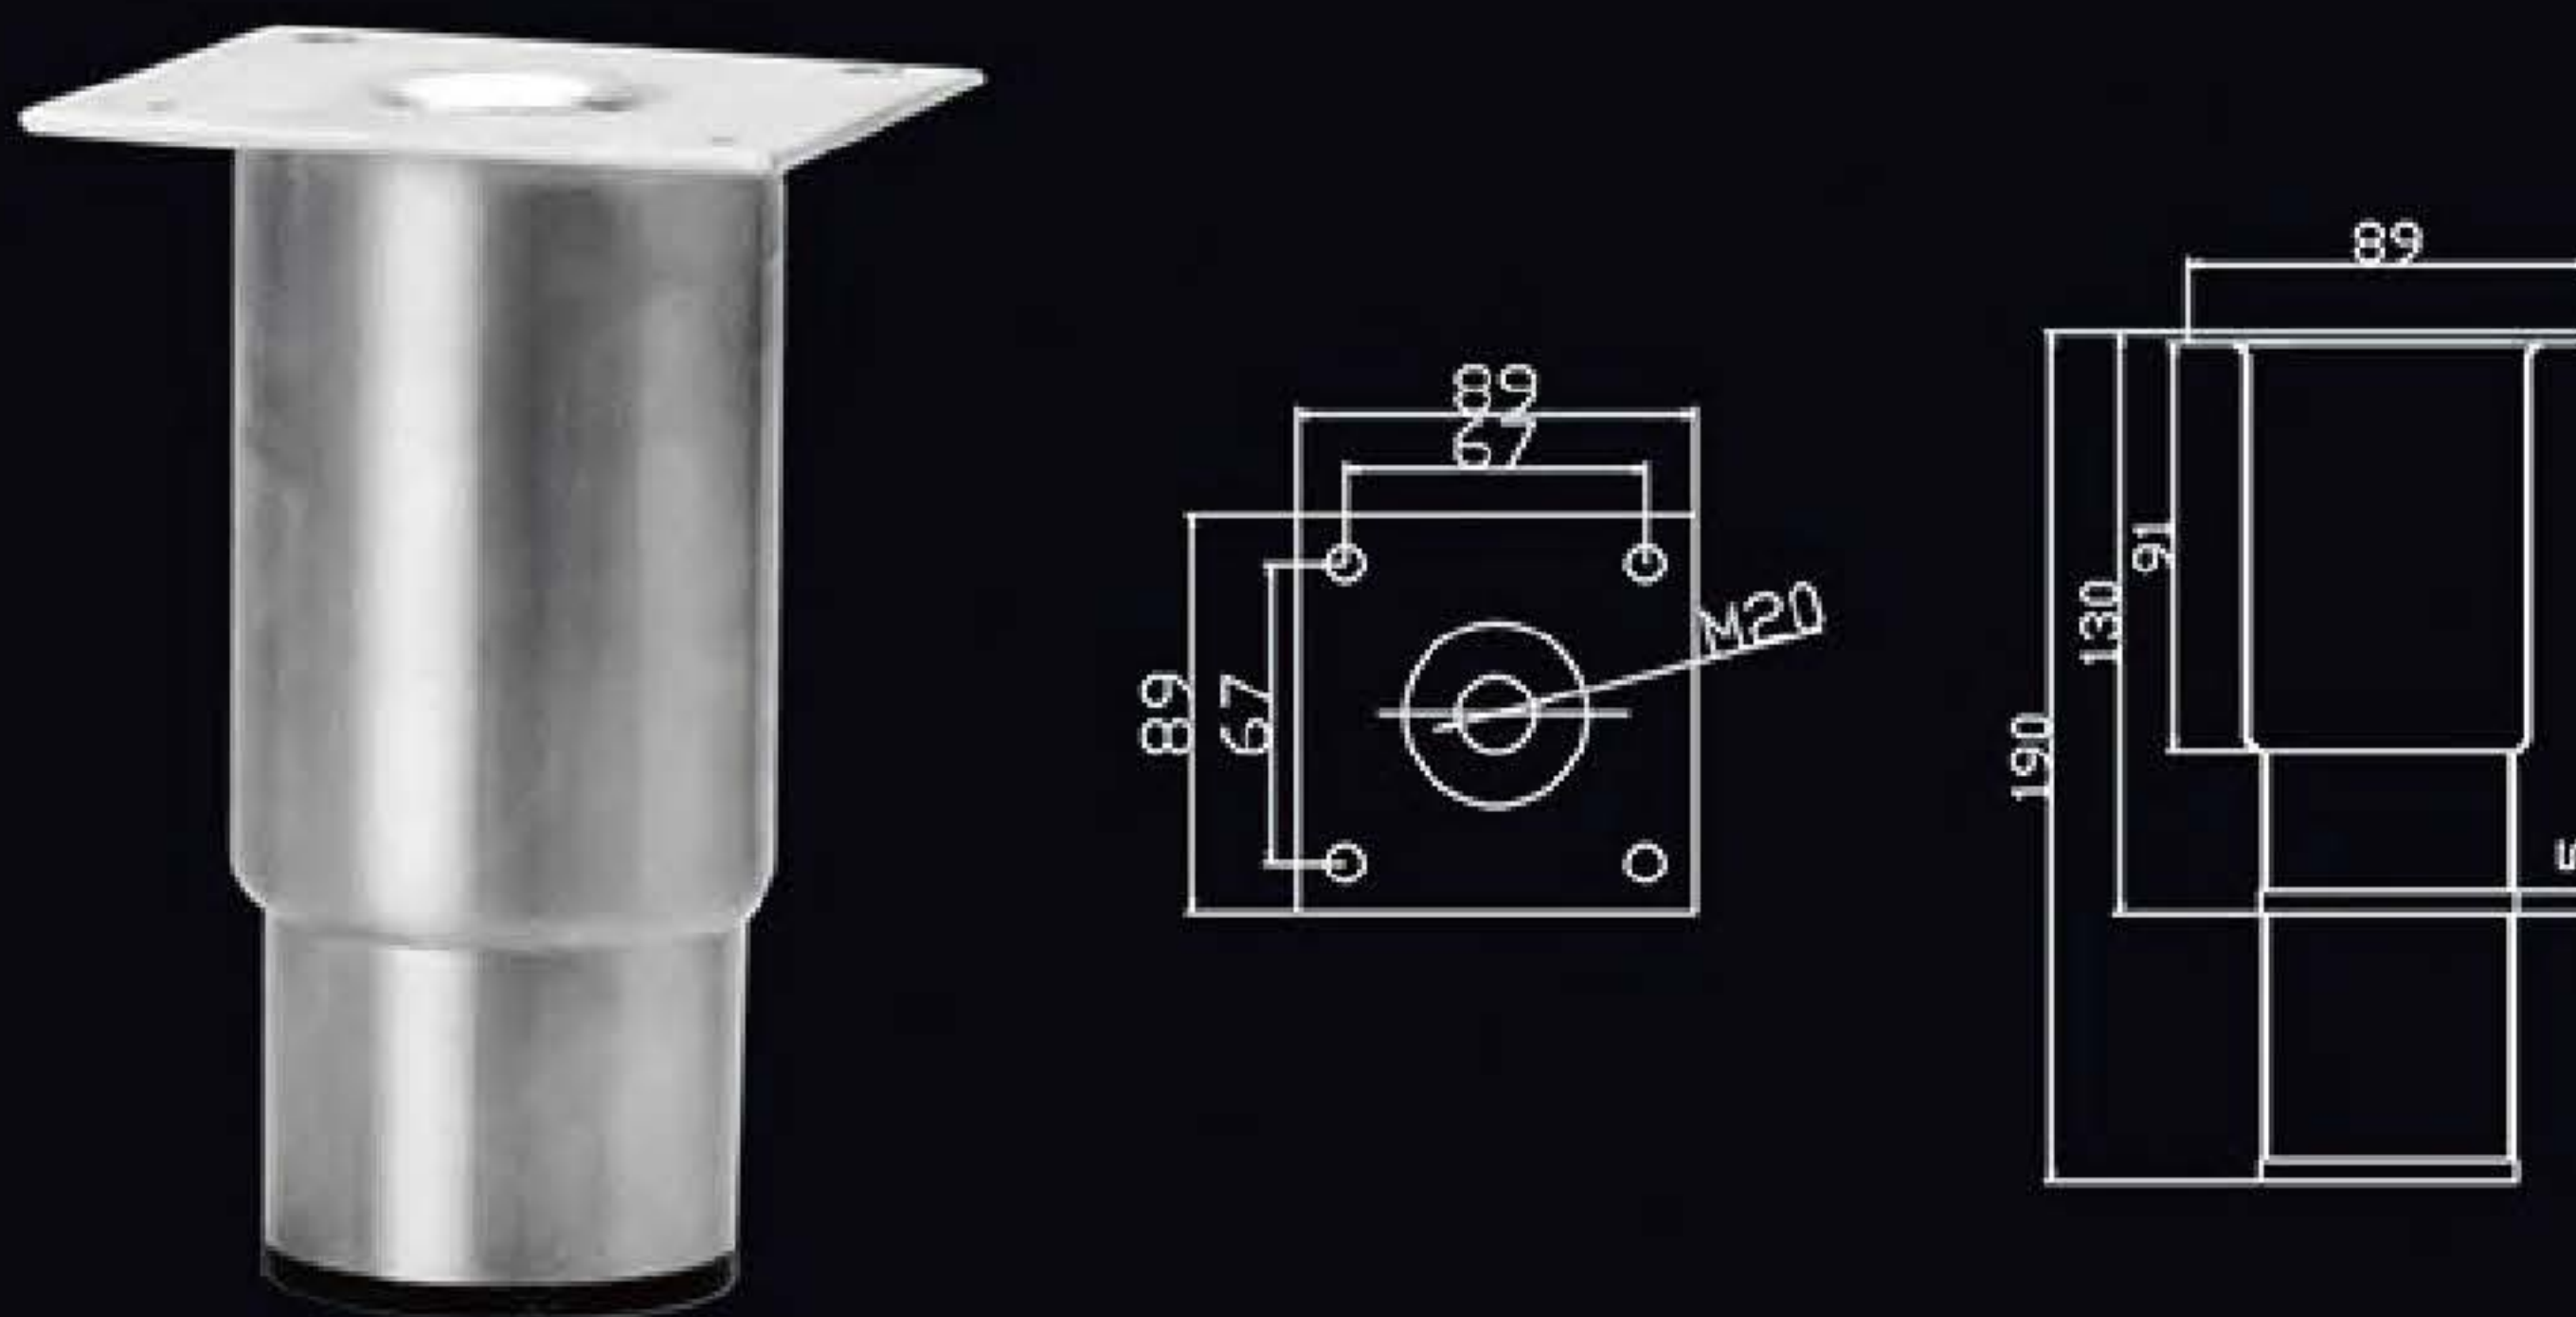


PNC 130-190_PLN 89x89

Body: 63MM O.D. Stainless steel pipe/
Parte móvil: Ø EXT 63MM de inoxidable
Foot: 56MM O.D. Stainless steel pipe/
Parte fija: Ø EXT 56MM de inoxidable
Plate size/Medida de chapa: 89 x 89 MM
Adjustable range/Nivelación: 130-190MM
Bottom: Plastic round/Circular plástico
Loading capacity/Resistencia: 1000KG

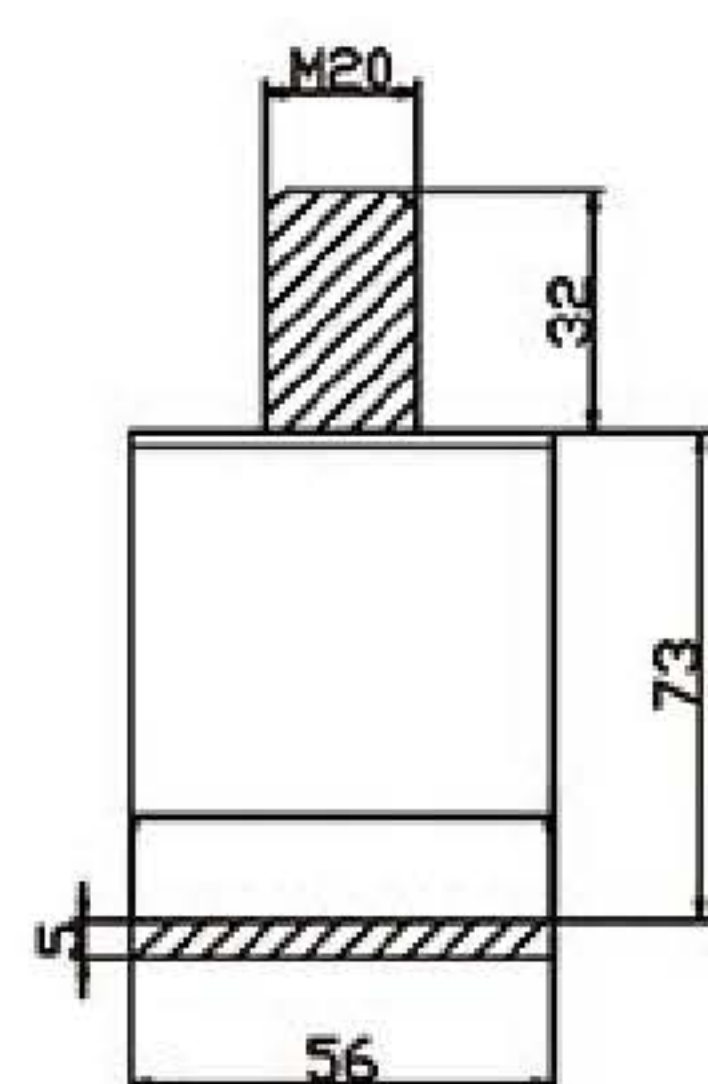


PATC105

Foot: 56MM O.D. Stainless steel pipe/
Parte fija: ø EXT 56MM de inoxidable
Bottom: Round black Plastic/Circular plástico negro
Loading capacity/Resistencia: 1000KG

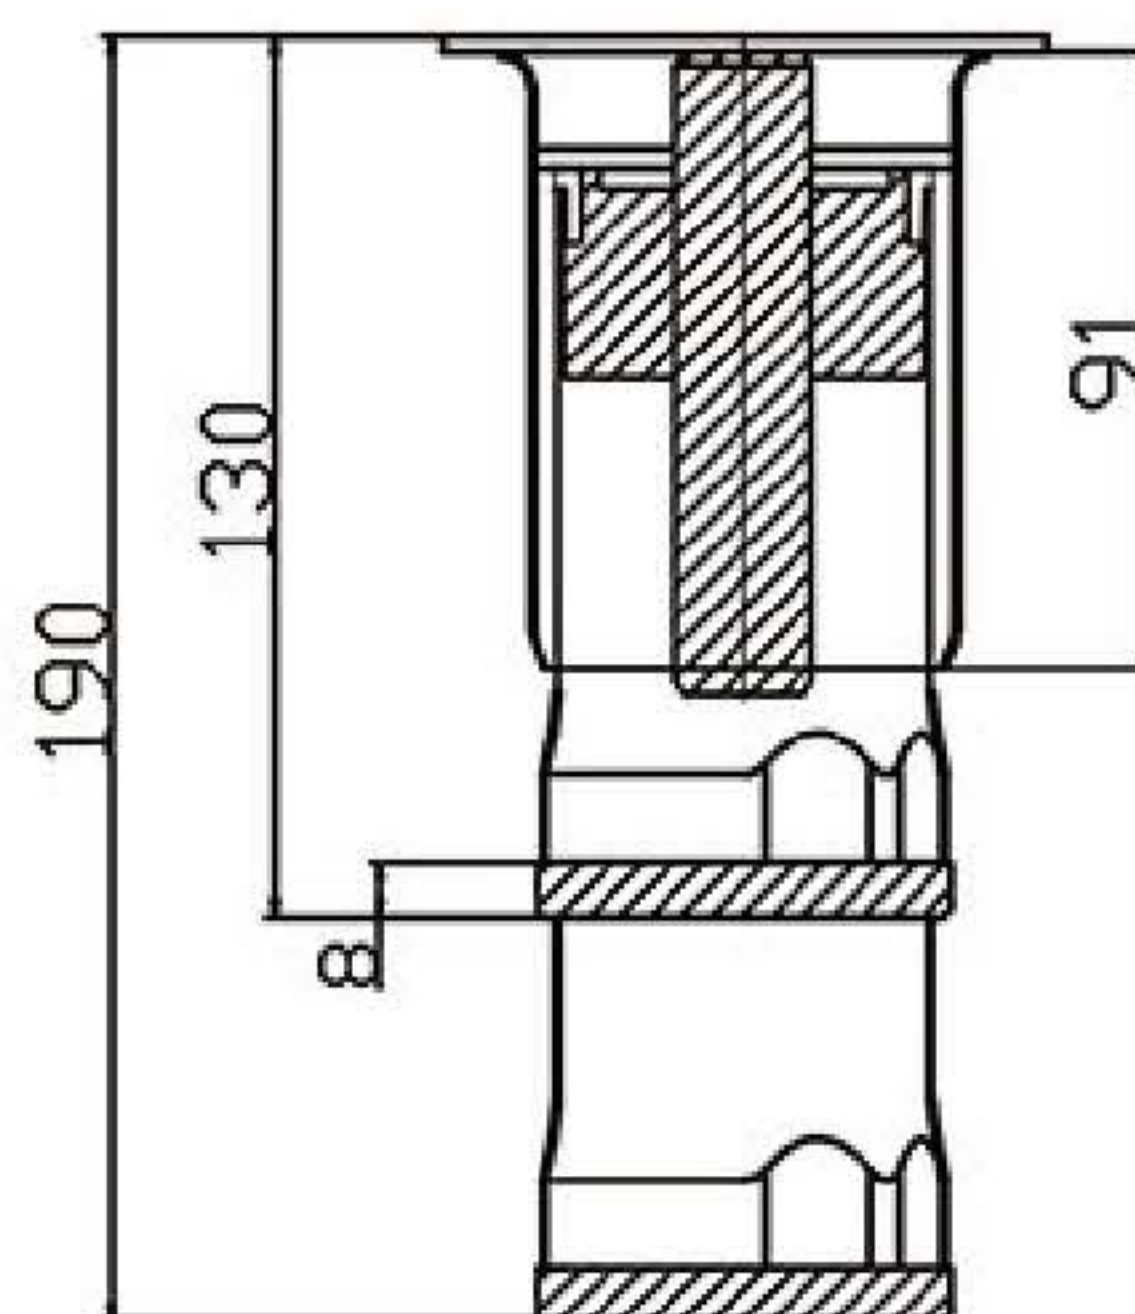


PNX 130-190_PLN 89x89

Body: 63MM O.D. Stainless steel pipe/
Parte móvil: ø EXT 63MM de inoxidable
Foot: 56MM O.D. Stainless steel pipe/
Parte fija: ø EXT 56MM de inoxidable
Plate size/Medida de chapa: 89 x 89 MM
Adjustable range/Nivelación: 130-190MM
Bottom: Octangular black plastic/Octágono plástico negro
Loading capacity/Resistencia: 1000KG

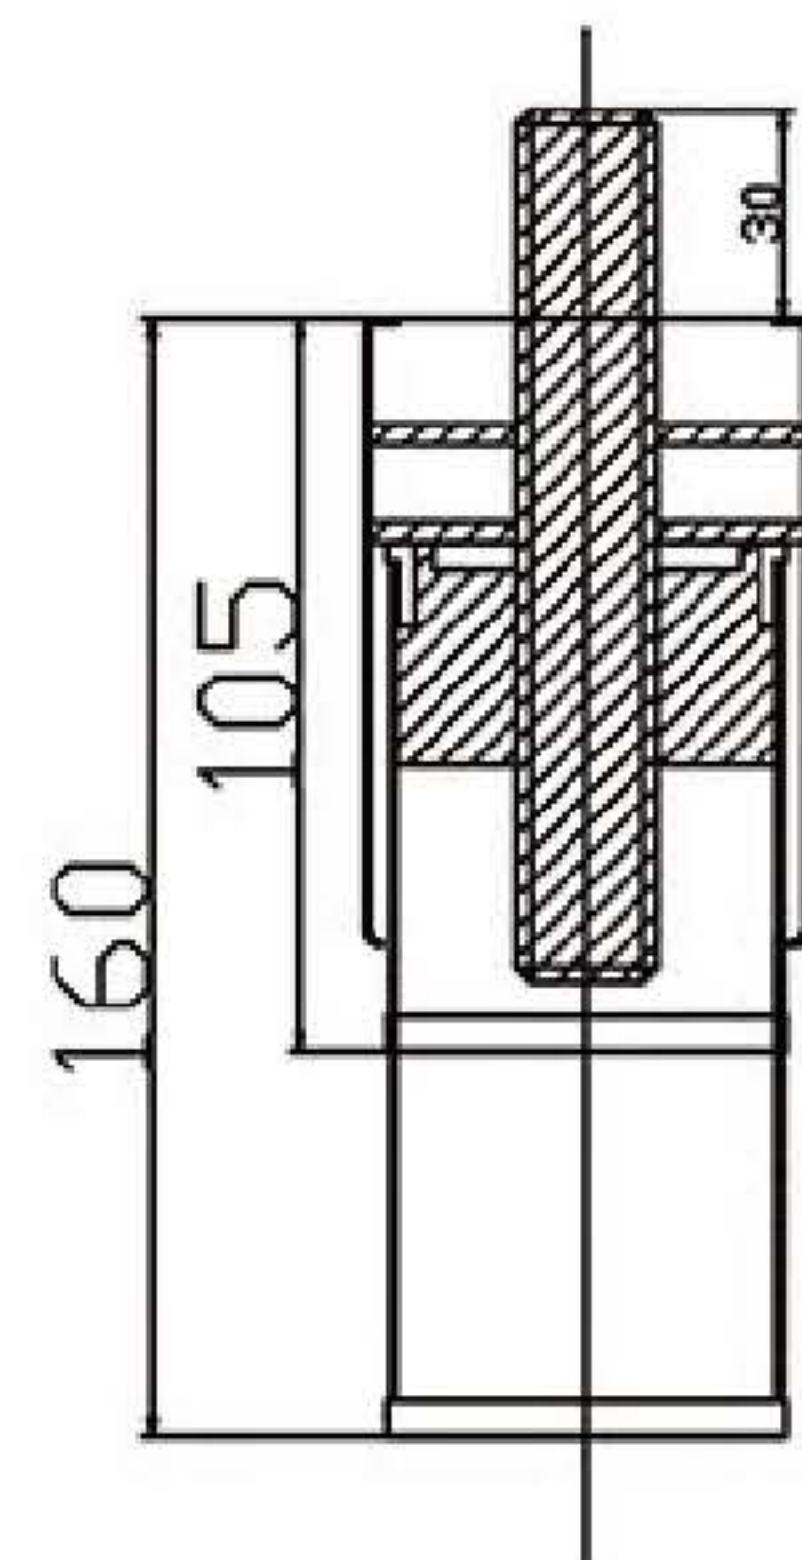

PNCTOR 105-160

Body: 63MM O.D. Stainless steel pipe/
Parte móvil: ø EXT 63MM de inoxidable
Foot: 56MM O.D. Stainless steel pipe/
Parte fija: ø EXT 56MM de inoxidable
Top: M20 STUD/Espárrago M20
Adjustable range/Nivelación: 105-160MM
Bottom: Round black plastic/Circular plástico negro
Loading capacity/Resistencia: 1000KG

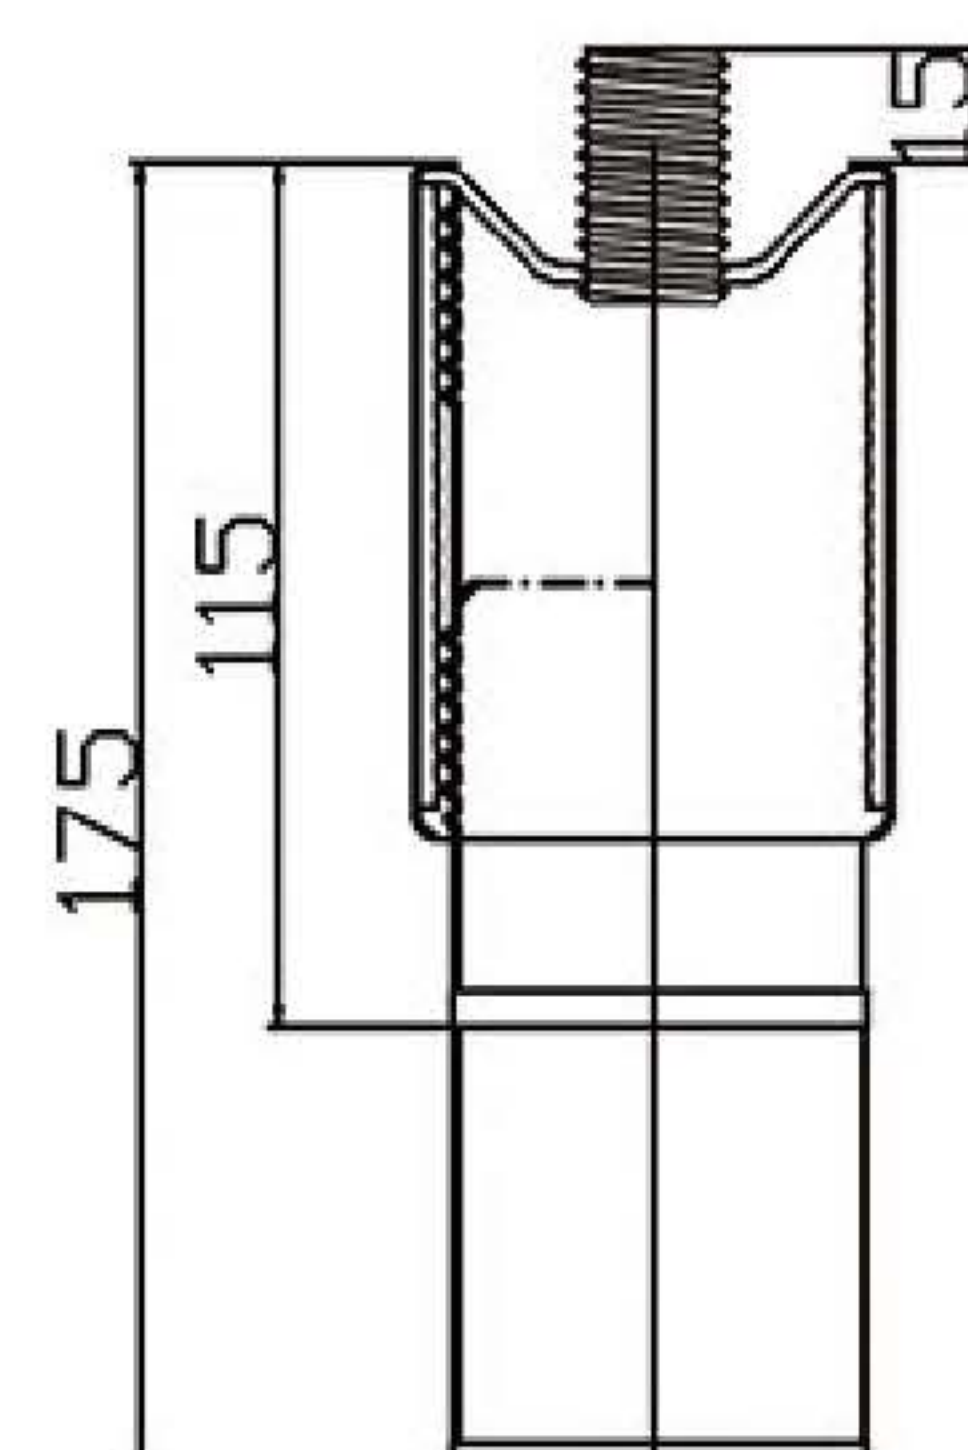


PNCTOR 115-175

Body: 63MM O.D. Stainless steel pipe/
Parte móvil: ø EXT 63MM de inoxidable
Foot: 56MM O.D. Stainless steel pipe/
Parte fija: ø EXT 56MM de inoxidable
Top: M20 STUD/Espárrago M20
Adjustable range/Nivelación: 115-175MM
Bottom: Round black plastic/Circular plástico negro
Loading capacity/Resistencia: 1000KG



56MM O.D. STAINLESS STEEL LEGS PATA Ø EXT 56MM DE INOXIDABLE

1. Stainless steel tubing is 0.7mm, #300 or #200 series. #4 satin finish.
 2. Static load ratings up to 2200lb. (1000kg)
 3. Leg height to your specification from 65mm to 127mm.
 4. Welded or embedded plates provided for easy mounting.
1. Tubo inoxidable 201 o 304, espesor 0.7mm. Opcional Mate
 2. Carga estática 1000Kg
 3. Nivelación 65mm-127mm
 4. Disponible: Chapa soldada o remachada

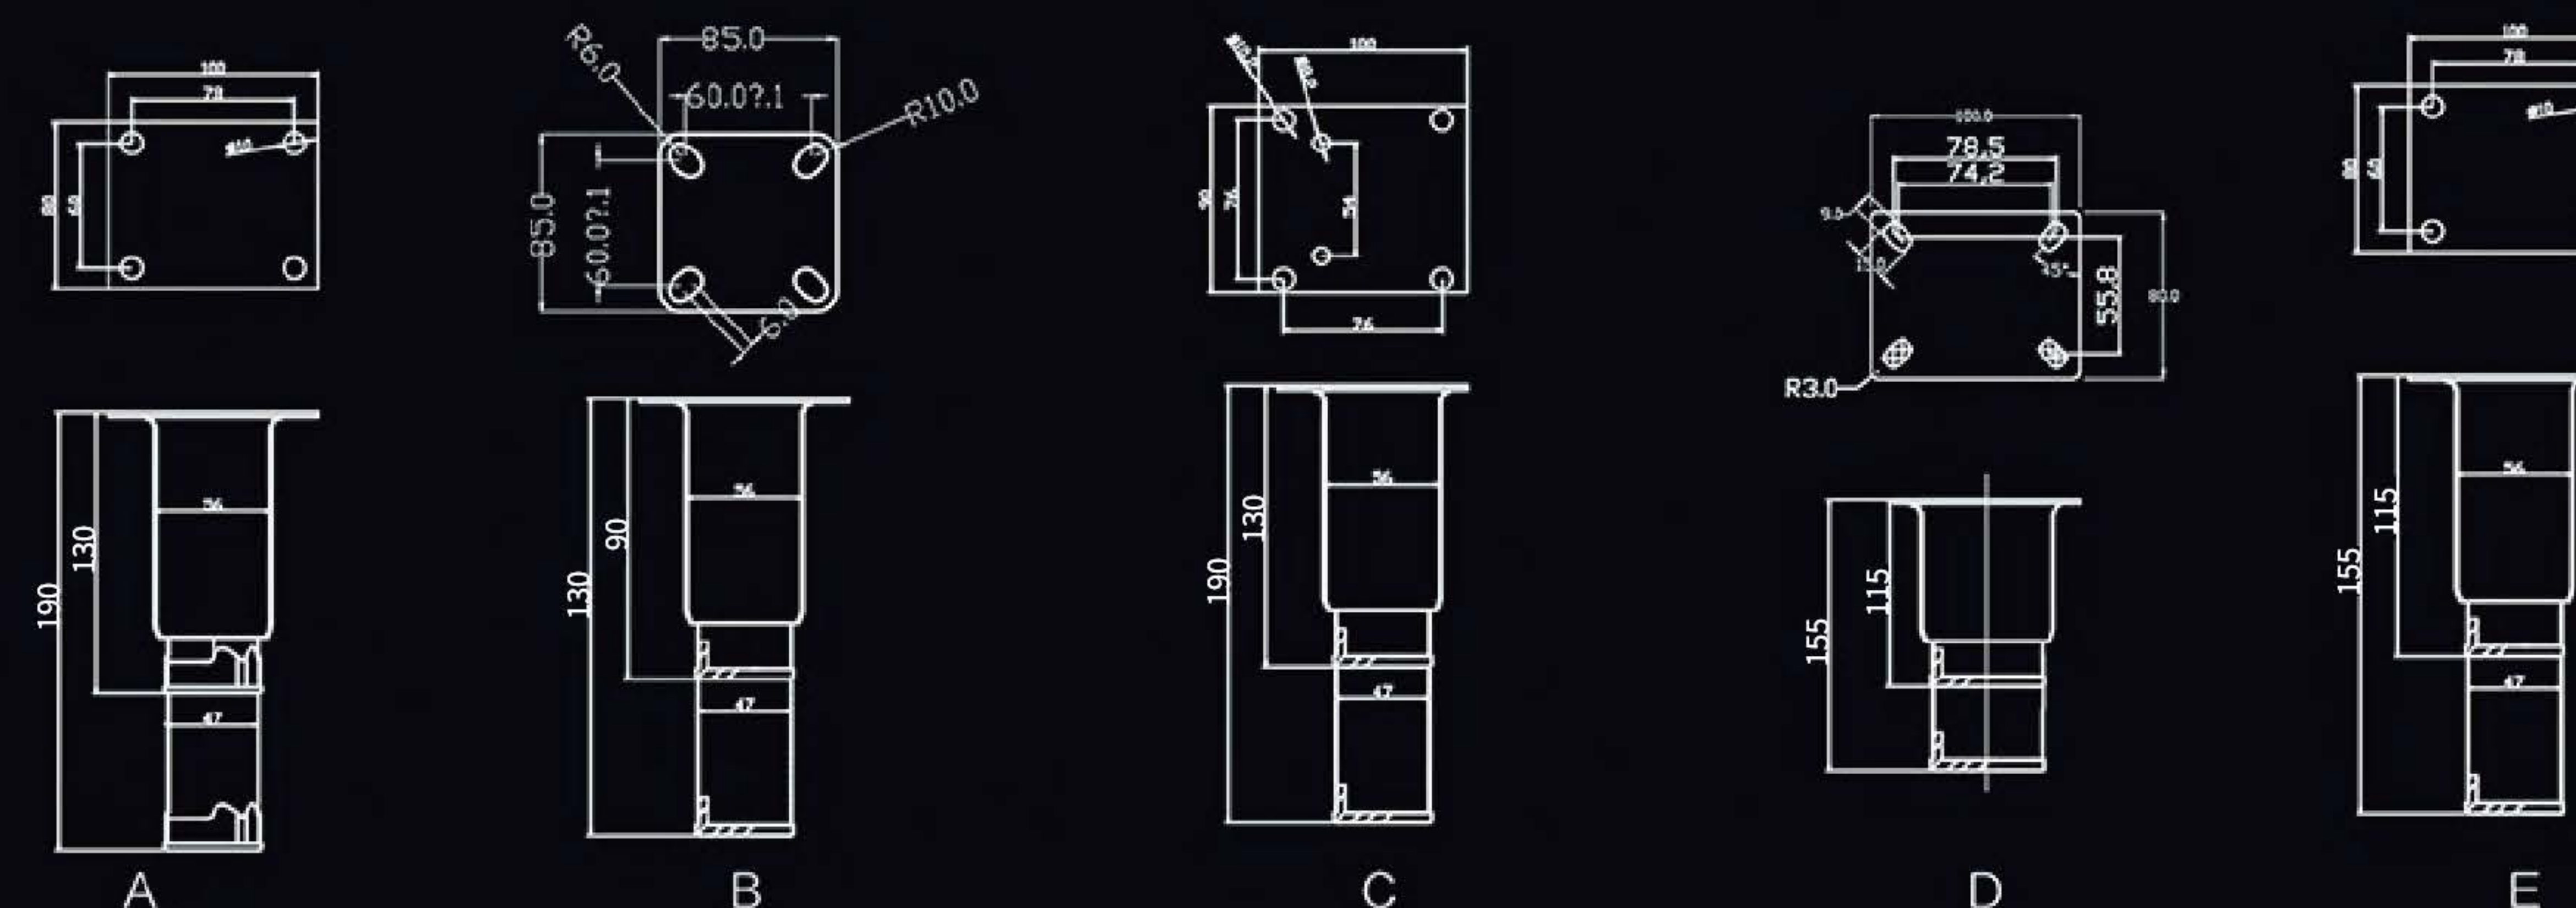

REF.	MODEL NO.	FIXED PLATE CHAPA	FOOT PARTE FIJA	MIN. HEIGHT MIN. ALTURA	MAX. HEIGHT MAX. ALTURA	STATIC LOAD RATING LBS.)KG)/(FT RESISTENCIA IB(KG)
A	PNX 130-190 PLN 90 x 100	Welded SS. Plate Chapa inox soldada	Octangular Octágono	130MM	190MM	2000(907)
B	PNC 90-130 PLN 85 x 85	Welded SS. Plate Chapa inox soldada	Round Redondo	90MM	130MM	2000(907)
C	PNC 130-190 PLN 90 x 100	Welded SS. Plate Chapa inox soldada	Round Redondo	130MM	190MM	2000(907)
D	PNC 115-155 PLN 90 x 100	Welded SS. Plate Chapa inox soldada	Round Redondo	115MM	155MM	2000(907)
E	PNX 115-155 PLN 90 x 100	Welded SS. Plate Chapa inox soldada	Octangular Octágono	115MM	155MM	2000(907)