




APPLICATION APLICACIÓN	REF.	MODEL NO.	BODY PARTE MÓVIL	FOOT PARTE FIJA	MIN.HEIGHT NIVELACIÓN	MAX.HEIGHT MAX.ALTURA	STATIC LOAD RATING LBS.(KG)/FT RESISTENCIA IB(KG)
IN 40MM, 1.2MM OR 1.5MM SQUARE TUBING PATA PARA TUBO 40 x 40MM,ESPE- SOR 1,5MM O 1,5MM	G	PN 37.5 x 37.5	Black plastic Plástico negro	SS clad hex Inoxidable	31MM	68MM	200(91)
	I	PN 40 x 40	Black plastic Plástico negro	SS clad hex Inoxidable	32MM	100MM	200(91)
	J	PN(plastic) 40 x 40	Gray/Black plastic Plástico gris/negro	Gray/Black plastic hex Plástico gris/negro	34MM	63MM	200(91)

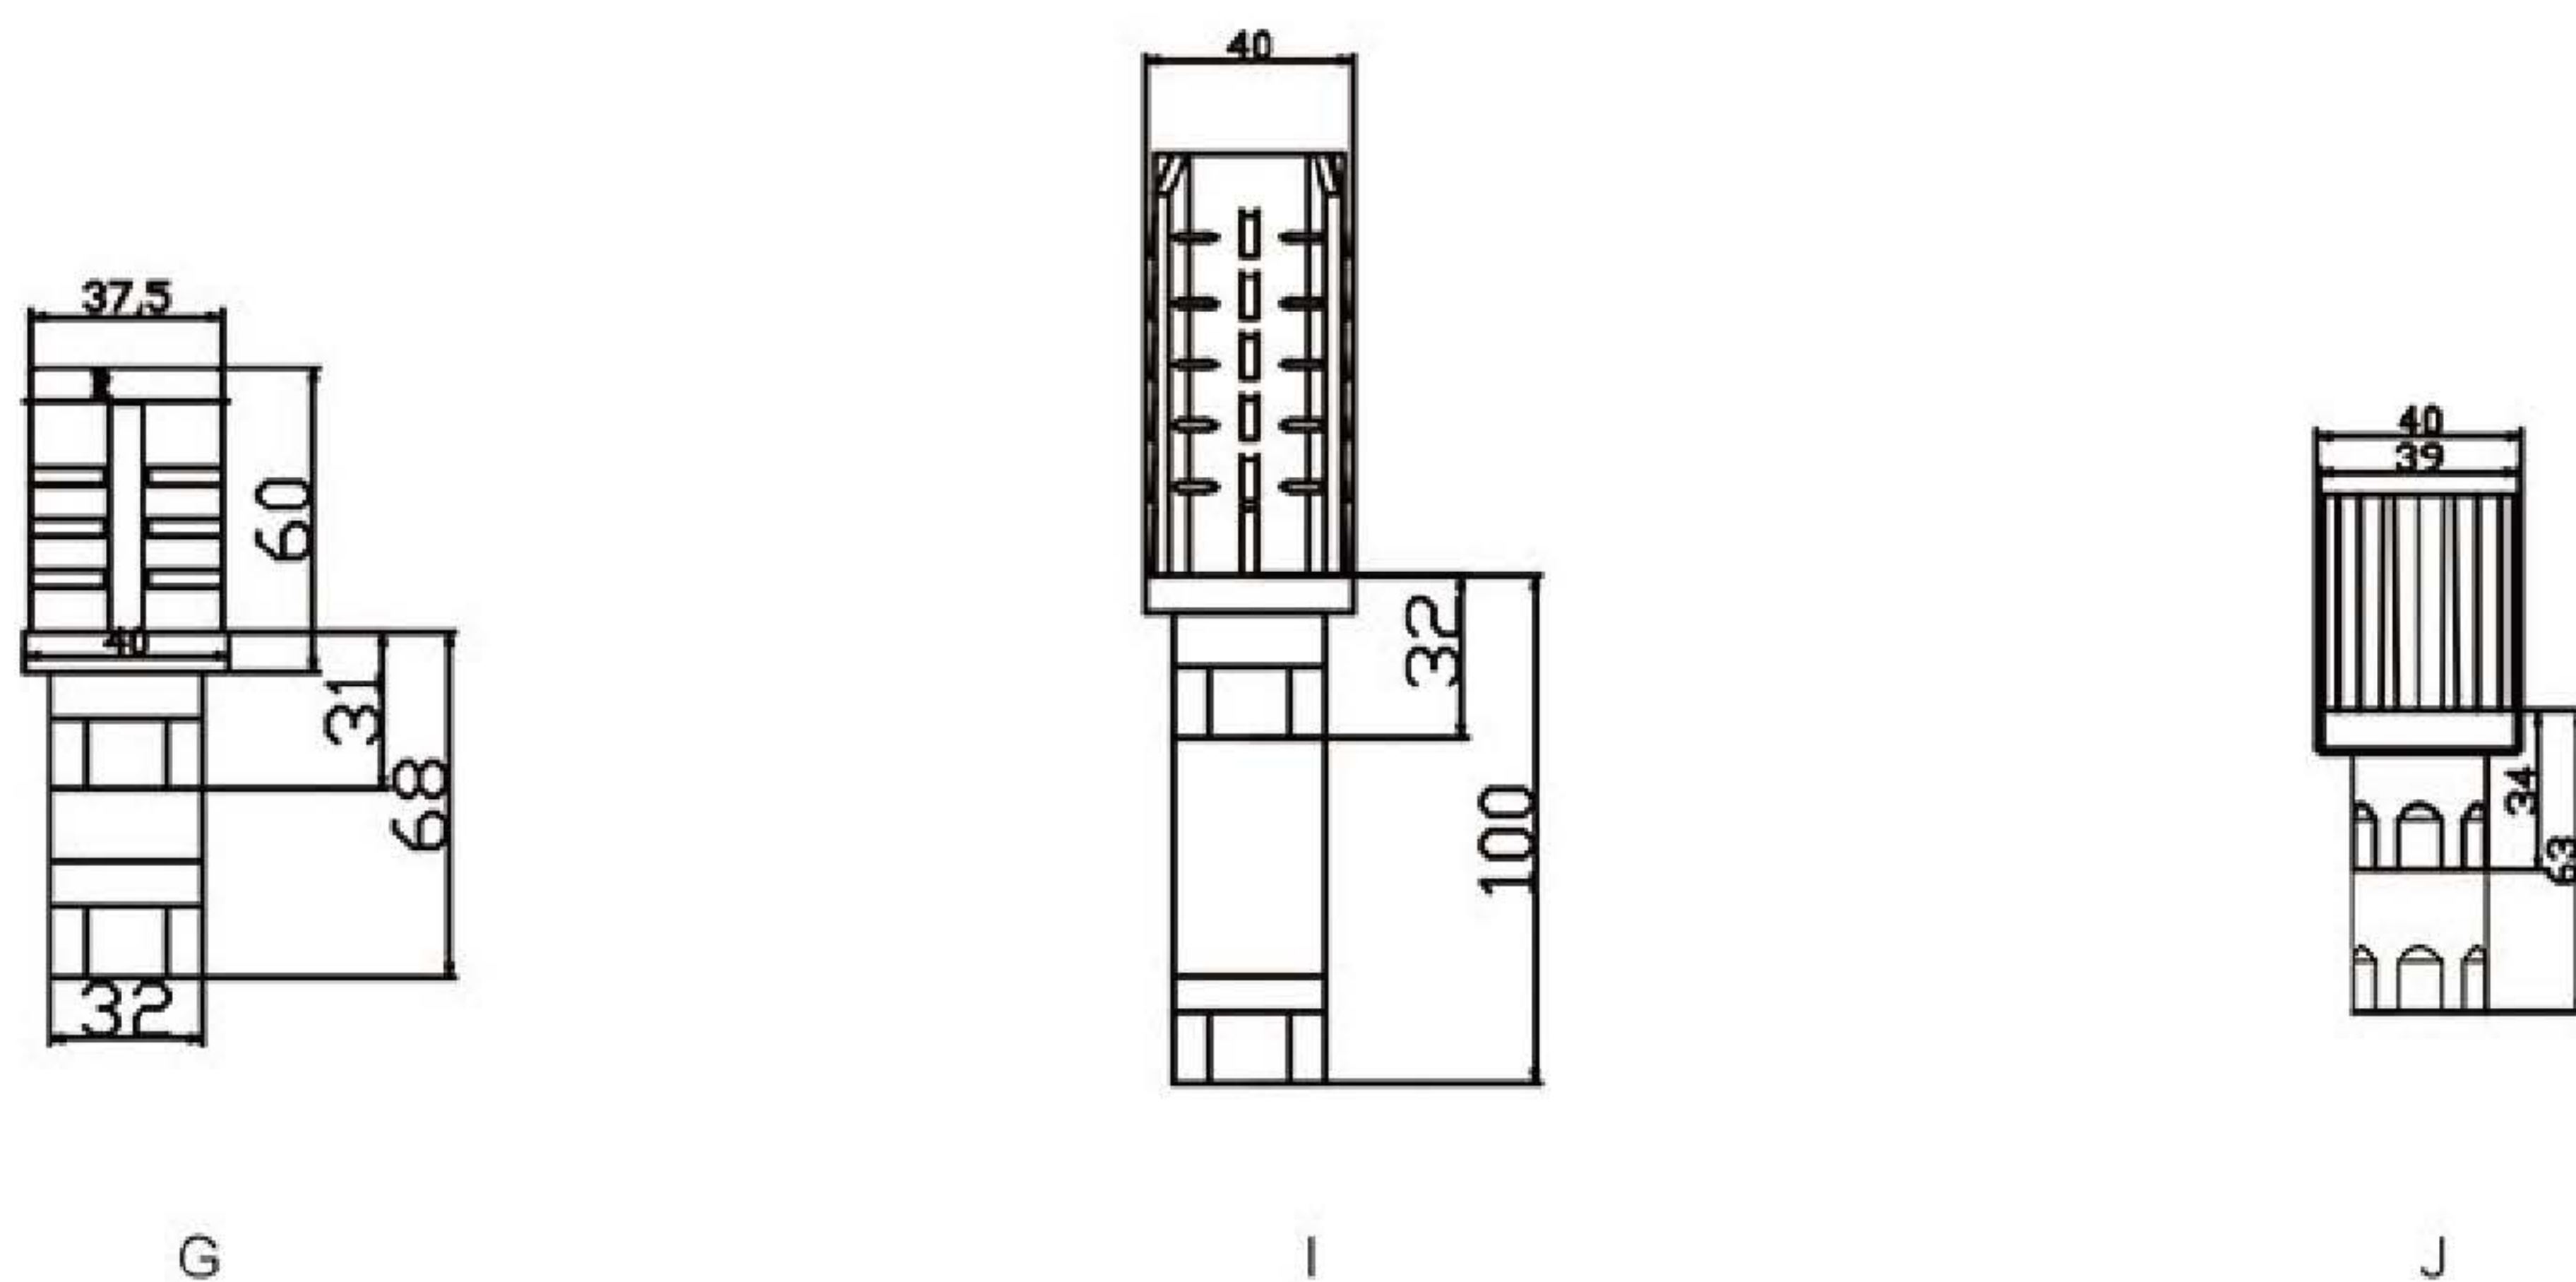

63MM O.D. STAINLESS STEEL LEGS
PATA Ø EXT 63MM DE INOXIDABLE

1. Stainless steel tubing is 0.7mm, #300 or #200 series. #4 satin finish.

2. Static load ratings up to 2200lb. (1000kg)


3. Leg height to your specification from 65mm to 127mm.

4. Welded or embeded plates provided for easy mounting.
1. Tubo inoxidable 201 o 304,espesor 0.7mm.Opcional Mate

2. Carga estática 1000Kg

3. Nivelación 65mm-127mm

4. Disponible: Chapa soldada o remachada

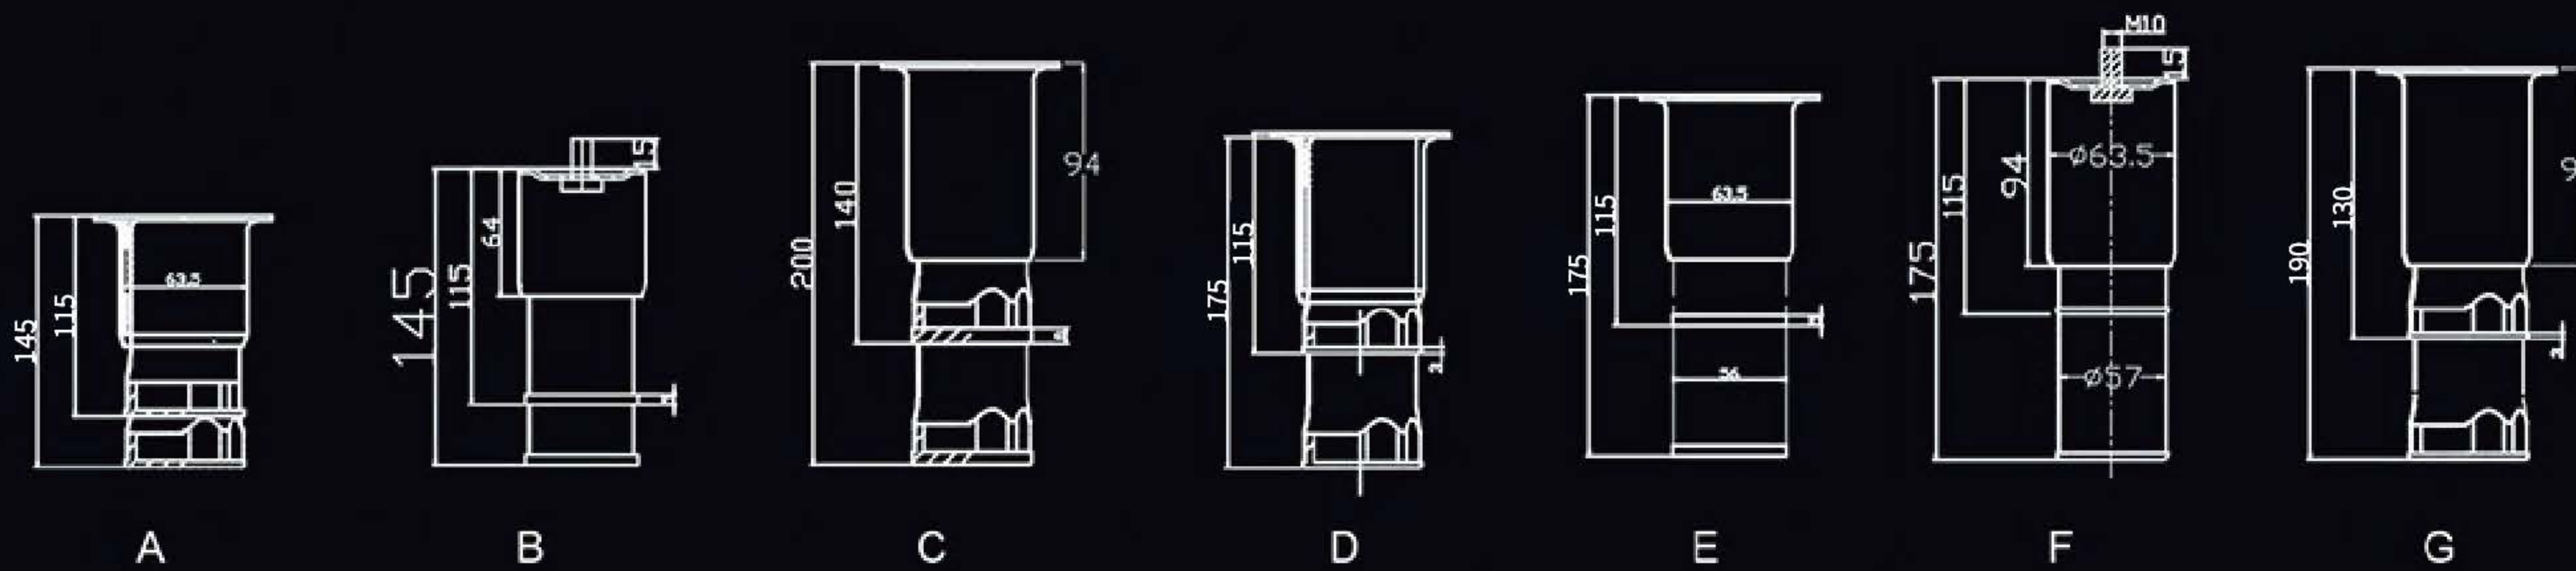

REF.	MODEL NO.	FIXED PLATE CHAPA	FOOT PARTE FIJA	MIN.HEIGHT MIN.ALTURA	MAX.HEIGHT MAX.ALTURA	STATIC LOAD RATING LBS.(KG)/FT RESISTENCIA IB(KG)
A	PNX 115-145	Welded SS.Plata Chapa inox soldada	Octangular Octágono	115MM	145MM	2000 (907)
B	PNCTOR 115-145	M10 Stud Tornillo M10	Round Redondo	115MM	145MM	2000 (907)
C	PNX 140-200	Welded SS.Plata Chapa inox soldada	Octangular Octágono	140MM	200MM	2000 (907)
D	PNC 115-175	Welded SS.Plata Chapa inox soldada	Round Redondo	115MM	175MM	2000 (907)
E	PNC 115-175	Welded SS.Plata Chapa inox soldada	Round Redondo	115MM	175MM	2000 (907)
F	PNCTOR 115-175	M10 Stud Tornillo M10	Round Redondo	115MM	175MM	2000 (907)
G	PNX 130-190	Welded SS.Plata Chapa inox soldada	Octangular Octágono	130MM	190MM	2000 (907)